

## Modular Membrane Nitrogen Generator Capacity 500psi Bacteria Elimination 500 Scfm

Our Product Introduction

### Basic Information

- Place of Origin: SUZHOU, CHINA
- Brand Name: SUMAIRUI GAS
- Certification: ISO9001, CE, BV, SGS, TUV, ASME, GOST,NB,NR ETC
- Model Number: OSM
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Exporting wooden case /Film packing
- Delivery Time: 30-45 days
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 100 sets/months



### Product Specification

- Material: Mild Steel/Stainless Steel
- Certificates: CE, ISO, ASME, GOST, KGS, NB Etc
- Capacity: 1000 CFM
- Purity: 95%-99.9%
- Pressure: 500 PSI
- Container: Yes
- Movable: Yes
- Application: Purging
- Condition: New
- Warranty: 1 Year
- Voltage: 220v/380v/50-60hz
- Weight: Actual Weight)
- Dimension(l\*w\*h): Actual Size
- Power(w): 0.5KW
- Color: White/customized


for more products please visit us on [n2-nitrogengenerator.com](http://n2-nitrogengenerator.com)

## Product Description

### Membrane modular N2 generator for the Bacteria Elimination with capacity 500 scfm purity 95% 500 psi by CE certificates

How does membrane technology work?

Membrane nitrogen generators are based on a simple working principle. The main part of a membrane generator is the membrane module (+/- 10cm in diameter), filled with small, hollow polymer fibers. First, dry, clean compressed air enters and due to the structure of these fibers parts of the air will flow to the outside of the fiber. This process is called permeation. During this process, water, oxygen and some of the argon exit through the membrane sides of the fibers. In the end, only nitrogen will remain. This is possible since different molecules permeate at different speeds. H<sub>2</sub>O will permeate very quickly, oxygen takes a little longer. Argon and Nitrogen permeate rather slowly, meaning that they will remain in the fibers long after the H<sub>2</sub>O and oxygen are gone (some of the Argon will permeate as well, but it would be inefficient to completely remove it from the air stream). Learn more about Nitrogen purity here. Because of the permeation through the fiber wall, an overpressure would occur inside the membrane housing. The fibers would clog and the permeation efficiency would be significantly lowered. To prevent that from happening there is an opening in the housing, the permeate vent, where these 'exhaust' gases (including H<sub>2</sub>O, oxygen and Argon) can escape.

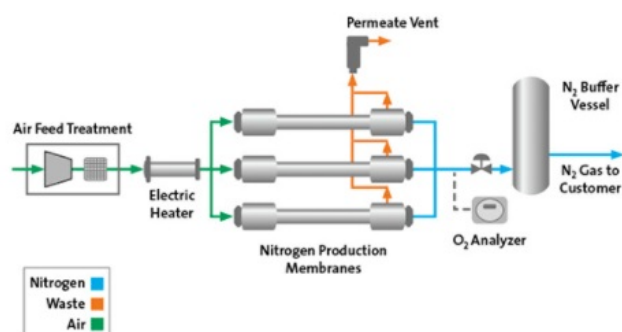

#### Nitrogen purity and requirements for the intake air

It is very important for the intake air to be clean and dry before it enters the membrane. If this is not the case, the shallow fibers will quickly clog. In order to prevent this from happening, correct air treatment of the feed air has to be installed. In some cases the needed filters and dryers will already be built into the generator itself. This would mean that, in some cases, no additional filters should be installed between the compressor and generator. The fibers of the membrane can handle water vapor without much problems. It is however very important that the air doesn't contain liquid water, since this will have a detrimental impact on the membrane. Therefore, it is required for a good water separation solution to be in place upstream the generator, a refrigerant dryer for example. Taking care of the intake air of the generator will protect the membrane and ensure a long lifetime. Take a look at a typical installation below.

#### Choosing between a Membrane and PSA generator

Since the air factor is generally lower in PSA generators, which results in lower operating costs, you might think that choosing between the two is an easy choice. However, there are some notable advantages to using a membrane generator. The first one being the simpler working principle of membrane generators, this affects maintenance costs and results in a smaller footprint of the installation. They also start up faster and are a lot quieter than PSA generators, who typically have to cope with their blow-off noises at the end of each cycle. This last advantage makes a membrane nitrogen generator more suitable for places in which there are a lot of people working. When selecting the right type of generator, it's wise to look at the application it will be used for and then, considering the total package of (dis)advantages, make a choice.

	MEMBRANE	PSA
ACHIEVABLE PURITY	EFFICIENTLY UP TO 99.9%	EFFICIENTLY UP TO 99.999%
EFFICIENCY	HIGH	HIGHER
PERFORMANCE VS. TEMP.	HIGHER AT HIGH TEMP.*	LOWER AT HIGH TEMP.
SYSTEM COMPLEXITY	LOW	MEDIUM
SERVICE INTENSITY	VERY LOW	LOW
PRESSURE STABILITY	STABLE	FLUCTUATING IN/OUTLET
FLOW STABILITY	STABLE	FLUCTUATING IN/OUTLET
START-UP SPEED	SECONDS	MINUTES/HOURS**
WATER (VAPOUR) SENSITIVITY	NO LIQUID WATER	PDP MAX 8°C (Generally)
OIL SENSITIVITY	NOT ALLOWED (< 0,01mg/m <sup>3</sup> )	NOT ALLOWED (< 0,01mg/m <sup>3</sup> )
NOISE LEVEL	VERY LOW	HIGH (blow-off peaks)
WEIGHT	LOW	MEDIUM

Item	Nitrogen purity (Nm3/hr)					Dimensions	Weight
	90%	95%	99%	99.5%	99.9%	(L*W*H) mm	KG
OSM15	135	61	23	15	6.5	450*300*1300	100
OSM30	270	122	46	30	13	550*500*1300	140
OSM60	540	244	92	60	26	900*850*1300	200
OSM120	1080	488	184	120	52	1200*1000*1500	280
OSM180	1620	732	276	180	78	1500*1200*1500	400
OSM240	1890	854	322	240	104	1800*1200*1600	520
OSM300	2700	1220	460	300	130	2300*1350*1800	600
OSM450	4050	1830	690	450	195	3850*1500*2000	800
OSM525	4725	2135	805	525	227.5	4200*1550*2100	950
OSM600	5400	2440	920	600	260	5000*1800*2250	1050
OSM675	6075	2745	1035	675	292.5	5500*1800*2350	1250
OSM750	6750	3050	1150	750	325	5850*1850*2400	1500
OSM900	8100	3660	1380	900	390	6500*1950*2400	1700
OSM1050	9450	4270	1610	1050	455	7800*2100*2450	1950
OSM1500	13500	6100	2300	1500	650	10500*2300*2600	2100
OSM1800	16200	7320	2760	1800	780	13000*2350*2600	2600





+8613812659092



dylan@sumairui.com



n2-nitrogengenerator.com

No 161,ZhongfengJie, Suzhou High technology district, Suzhou